

**The insulation vacuum designed for the needs of the Professional Contractor!**



**“The system performs like beast”**

Intec’s VORTEC<sup>®</sup> family of vacuums offer high productivity with robust engineering combined to provide the highest value vacuum in today’s market. The ‘VORTEC Beast’ is designed for fast & profitable recycling of spray applied insulation, removal of damaged insulation due to fire, water, and smoke, and HVAC cleaning. *The most productive VORTEC yet.*

**Engineered for High Productivity**



industry standard  
impeller



**VORTEC Beast**  
impeller

**Built-to-Last for High Value Generation**

- Oversized IMPELLER ➤ SHROUD – long lasting moves High Volumes ✓ thick gauge
- Run Flat WHEELS ✓ double-thick Abrasive
- POWERED by HONDA Resistant at wear areas
- Highly Portable ➤ Powder coated

*Honda’s V-Twin delivers over 22 net horsepower (note: all other motor manufacturer’s use gross hp which is running engine w/out muffler and air filter – not realistic. Effective gross hp is appx 26-27hp) outperforming most to all vacuum motors used today. Variable Timing Digital Ignition--HONDA exclusive--provides optimal ignition timing based on engine speed to deliver consistent power under load, excellent starting, smooth operation, and reduced fuel consumption with outstanding emissions performance.*



integrity excellence innovation trust

800-666-1611

www.inteccorp.com

Click pictures for website link

Rev: 20200628

Intec’s Professional Grade Equipment



Engineered for High Productivity

Built-to-Last for High Value Generation




Insulation Blowing Machines





## Specifications

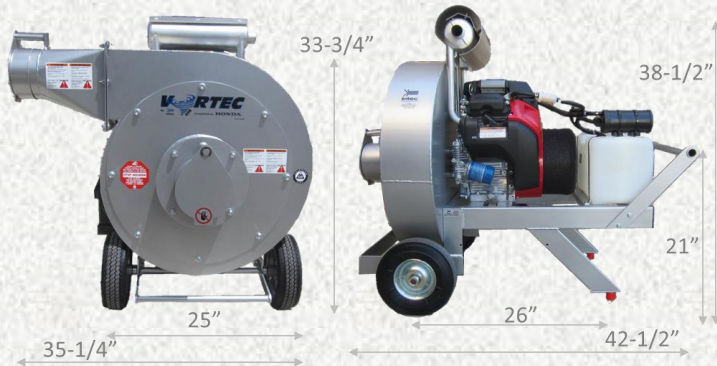

- Body: Powder-coated steel with 10" run-flat wheels.
- Weight: 362 lbs (165kg).
- Inlet: 6" standard. 8" optional
- Outlet: 6".
- Motor: Electric start Honda GX690 V-Twin.
- Oil Alert system shuts motor when oil is low to prevent engine damage.
- Fuel: 4 gallon translucent gas tank with filters.
- Oversized Impeller.
- Extra thick shroud – 2X thick abrasive resistant in main wear area.
- Warranty: 1 year ltd; HONDA provides 3 year engine.

Specifications subject to change; contact Intec for current specifications

## Accessories – can be used with all vacuums



### Enhance Safety & Extend the Vacuum's Life

- ✓ Safety enhanced by limiting foreign objects from exiting vacuum at high speeds.
- ✓ Vacuum's Life extended by preventing foreign materials from entering the vacuum & potentially causing damage to the impeller, shroud, and engine.



### Simplify pickup

- ✓ 4" and 6" diameters, 4' and 2' lengths.
- ✓ Swivel hose connector simplifies movement.



## Features

Honda V-Twin electric start

- Extra quiet exhaust
- Oversized shaft
- Inlet air filter to limit fibrous particles from entering cooling fins – enables appropriate engine cooling
- Simple controls with hour meter



- Pivoting inlet & outlet gates promote safe operation, further enhanced by the VORTEC vacSHIELD
- Inlet conversion from 8" to 6" optional

- Durable engineered frame
- Thick rear handle makes easy to move
- Minimal space for large vacuum



- Intec exclusive 'anti-tip' frame
- Wheel barrow like portability
- Abrasive Resistant Steel on curved section of shroud



6" diameter vacTUFF hose

4" diameter vacTUFF hose

Intec's swivel hose connectors


vacSHIELD

vacTUBES

- ✓ Translucent ~ see product flow
  - ✓ Extra durable to resist punctures
  - ✓ Smooth interior for enhanced production
  - ✓ Blue wear strip extends life
- also look to Intec for vacuum bags



Distributed by

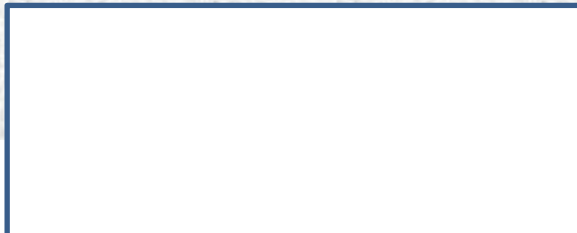

Manufactured by

Insulation Technology Corporation, d.b.a. Intec  
4040 Kodiak Court  
Frederick, CO 80504

Click pictures for website link



1-800-666-1611  
www.inteccorp.com

Local: 303-833-6644  
Fax: 303-833-6650  
sales@inteccorp.com

... it's the 'tec' inside that counts!